

MV-CB120-10UM/UC-S

12 MP 1/1.7" CMOS USB3.0 Board Level Camera

Introduction

MV-CB120-10UM/UC-S camera adopts Sony IMX 226 chip and provides high quality image. It adopts M12-mount and is small in size which can meet different spatial requirements.


Key Feature

- Single board design for flexible installation
- Supports auto and manual adjustment for gain, exposure control, white balance, LUT, Gamma correction, and etc.
- Adopts image interpolation algorithm for color camera to have better color correction
- Power supply and data transmission via USB3.0 interface
- Compatible with USB3 Vision Protocol, GenICam standard, and the third-party software based on these protocol and standard.




GEN<i>i</i>CAM **USB**
VISION

Sensor Quantum Efficiency

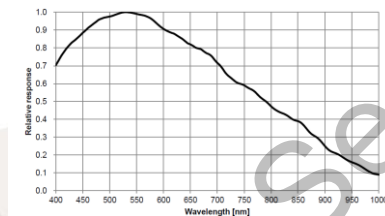

MV-CB120-10UM-S



MV-CB120-10UC-S


Applicable Industry

Electronic semiconductor, factory automation, logistics, liquor and beverage, medicine packing and etc.

Available Model

- Mono Camera: MV-CB120-10UM-S
- Color Camera: MV-CB120-10UC-S

Dimension

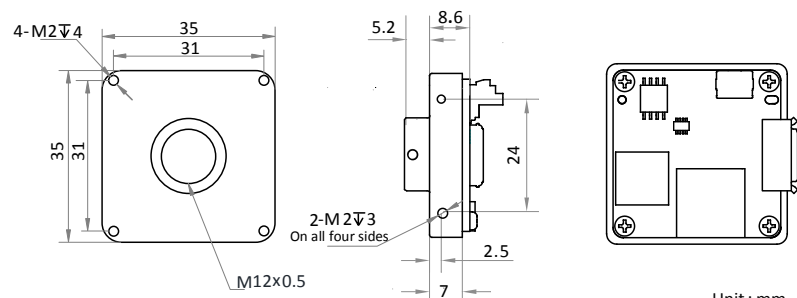

Specification

Model	MV-CB120-10UM-S	MV-CB120-10UC-S
Parameters	12 MP 1/1.7" CMOS USB3.0 Board Level Camera	
Camera		
Sensor type	CMOS, rolling shutter	
Sensor model	Sony IMX226	
Pixel size	1.85 μm \times 1.85 μm	
Sensor size	1/1.7"	
Resolution	4032 \times 3036	
Frame rate	28 fps	21 fps
Dynamic range	65 dB	
SNR	40 dB	
Gain	0 dB to 20 dB	
Exposure time	11 μs to 2 s	23 μs to 2 s
Shutter mode	Off/ Once /Continuous exposure mode	
Mono/Color	Mono	Color
Pixel format	Mono 8/10/10p/12/12p	Mono8/10/12, Bayer RG 8/10/10p/12/12p YUV 422 Packed, YUV422_YUYV_Packed, RGB8
Acquisition mode	Continuous mode, single frame mode	
Binning	Not support	
Decimation	1 \times 1, 1 \times 2, 2 \times 1, 2 \times 2	Not support
Reverse image	Supports horizontal and vertical reverse image output	
Electrical features		
Data interface	USB3.0, USB2.0	
Digital I/O	Bi-directional non-isolated I/O \times 2 (Line1, Line2)	
Power supply	USB3.0 power supply	
Power consumption	< 2.45 W@5 VDC	
Structure		
Dimension	35 mm \times 35 mm \times 8.6 mm (1.4" \times 1.4" \times 0.3")	
Weight	Approx. 30 g (0.07 lb)	
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$)	
Humidity	20% to 80% RH, without condensation	
General		
Client software	MVS or third-party software with USB3 Vision Protocol	
Operating system	Windows XP/7/10 32/64bits, Linux 32/64bits or MacOS 64bits	
Compatibility	USB3 Vision, GenICam	
Certification	CE, FCC, RoHS	



Germany, Austria, Switzerland	BeNeLux
Sedeco Imaging GmbH	Sedeco Imaging B.V.
Unterer Dammweg 12	Trasmolenlaan 12
76149 Karlsruhe	3447 GZ Woerden
Germany	the Netherlands
T. +49 721 5604 7980	T. +31 348 749110
info@sedeco-imaging.com	info@sedeco-imaging.nl

www.sedeco-imaging.com