

## MV-CE060-10UM/UC

6 MP 1/1.8" CMOS USB3.0 Area Scan Camera

### Introduction

MV-CE060-10UM/UC camera adopts Sony IMX178 sensor to provide high-quality image. It uses USB3.0 interface to transmit non-compressed images in real time with max. frame rate reaching 42.7 fps.



### Key Feature

- Supports auto and manual adjustment for gain, exposure control, white balance, LUT, Gamma correction, etc.
- Supports hardware triggering, software triggering and free run mode
- Adopts M2 screw holes for securing cable that connects USB3.0 interface
- Compatible with USB3 Vision Protocol, GenlCam Standard, and the third-party software based on these protocol and standard

**GEN<I>CAM**

**USB<sup>TM</sup>**  
VISION


### Available Model

- Mono Camera: MV-CE060-10UM
- Color Camera: MV-CE060-10UC


### Applicable Industry

Electronic semiconductor, factory automation, logistics, liquor and beverage, medicine packing, etc.

### Sensor Quantum Efficiency

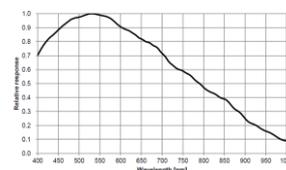


MV-CE060-10UM

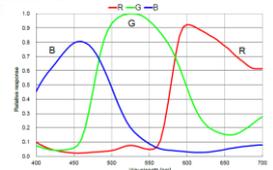

MV-CE060-10UC

### Dimension

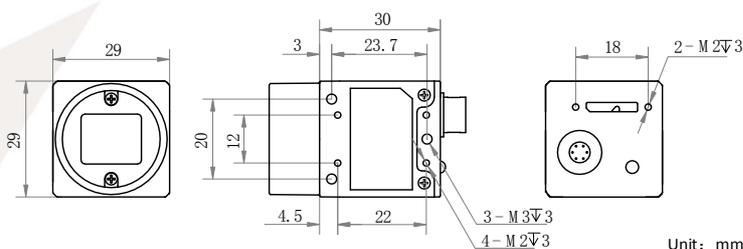

Unit: mm



## Specification

| Model                      | MV-CE060-10UM   | MV-CE060-10UC  |
|----------------------------|---|--|
| <b>Camera</b>              |   |  |
| Sensor type                | CMOS, rolling shutter   |  |
| Sensor model               | Sony IMX178   |  |
| Pixel size                 | 2.4 μm × 2.4 μm   |  |
| Sensor size                | 1/1.8"  |  |
| Resolution                 | 3072 × 2048   |  |
| Frame rate                 | 42.7 fps  |  |
| Dynamic range              | 71.3 dB   |  |
| SNR                        | 41.3 dB   |  |
| Gain                       | 0 dB to 20 dB   |  |
| Exposure time              | 16 μs to 1 s  |  |
| Shutter mode               | Off/Once/Continuous exposure mode   |  |
| Mono/color                 | Mono  | Color  |
| Pixel format               | Mono 8/10/10p/12/12p  | Mono 8/10/12, Bayer GB 8/10/10p/12/12p, YUV422Packed, YUV422_YUYV_Packed, RGB8 |
| Acquisition mode           | Continuous mode and SingleFrame mode  |  |
| Reverse image              | Supports horizontal and vertical reverse image output   |  |
| Image buffer               | 128 MB  |  |
| <b>Electrical features</b> |   |  |
| Data interface             | USB3.0  |  |
| Digital I/O                | 6-pin Hirose connector provides power and I/O, including opto-isolated input x 1 (Line0), opto-isolated output x 1 (Line1), bi-directional non-isolated I/O x 1 (Line2) |  |
| Power supply               | 5 VDC to 15 VDC, supports USB3.0 power supply   |  |
| Power consumption          | < 2.7 W@5 VDC   |  |
| <b>Structure</b>           |   |  |
| Lens mount                 | C-Mount   |  |
| Dimension                  | 29 mm × 29 mm × 30 mm (1.1" × 1.1" × 1.2")  |  |
| Weight                     | < 56 g (0.12 lb.)   |  |
| Ingress protection         | IP30 (under proper lens installation and wiring)  |  |
| Temperature                | Working temperature: 0 °C to 50 °C (32 °F to 122 °F)<br>Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)   |  |
| Humidity                   | 20% to 80% RH, without condensation   |  |
| <b>General</b>             |   |  |
| Client software            | MVS or third-party software meeting with USB3.0 Vision Protocol   |  |
| Operating system           | 32/64-bit Windows XP/7/10, 32/64-bit Linux  |  |
| Compatibility              | USB3 Vision V1.0, GenICam   |  |
| Certification              | CE, FCC, RoHS, KC   |  |



Germany, Austria, Switzerland  
 Sedeco Imaging GmbH  
 Unterer Dammweg 12  
 76149 Karlsruhe  
 Germany  
 T. +49 721 5604 7980  
 info@sedeco-imaging.com

BeNeLux  
 Sedeco Imaging B.V.  
 Trasmolenlaan 12  
 3447 GZ Woerden  
 the Netherlands  
 T. +31 348 749110  
 info@sedeco-imaging.nl

[www.sedeco-imaging.com](http://www.sedeco-imaging.com)