

Dome Light

Square Dome Light

IFH series

Lightweight, thin 8-mm dome light




DC 24V Models Available




Model	Light Color	Power Consumption (W)	Input Voltage	SAG (*)	Power Supply	Drawing
IFH-25/25□	R	0.3	DC12V	6D	ILP-30M2 (P.69) IDGB series (P.67) other, overdrive power supply etc.	1
	DW B G	0.4		FF		
	AIR (850)	0.3		FF		
IFH-50/50□	R	2		6E		2
	DW B G	2.9		FF		
	AIR (850)	2		FF		
IFH-75/75□	R	2.9		6F		3
	DW B G	4.4		FF		
	AIR (850)	2.9		FF		
IFH-100/100□	R	3.9		70		4
	DW B G	5.8		FF		
	AIR (850)	3.9		FF		
IFH-150/150□	R	5.8	71	5		
	DW B G	8.7	FF			
	AIR (850)	5.8	FF			
IFH-200/200□	R	7.7	73	6		
	DW B G	11.6	FF			
	AIR (850)	7.7	FF			


□ represents light color (R=Red, DW=White, B=Blue, G=Green, AIR(850)=Infrared)
 *Input voltage is DC 12V, but DC 24V models are also available.
 *See page 60 for DC 24V models. *Sizes other than those above are also available.
 *The SAG value indicates the maximum voltage setting for SAG power supplies. For details, see page 75.

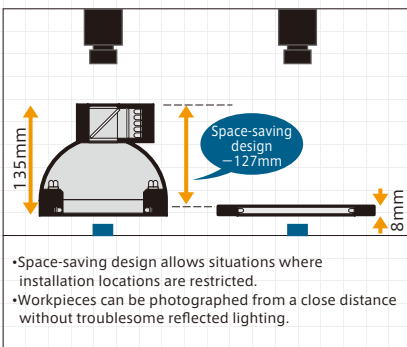


Luminance Distribution Chart (Reference Values)



Entire subject can be illuminated uniformly.
 Measurement model: IFH-100/100DW
 WD: 10mm

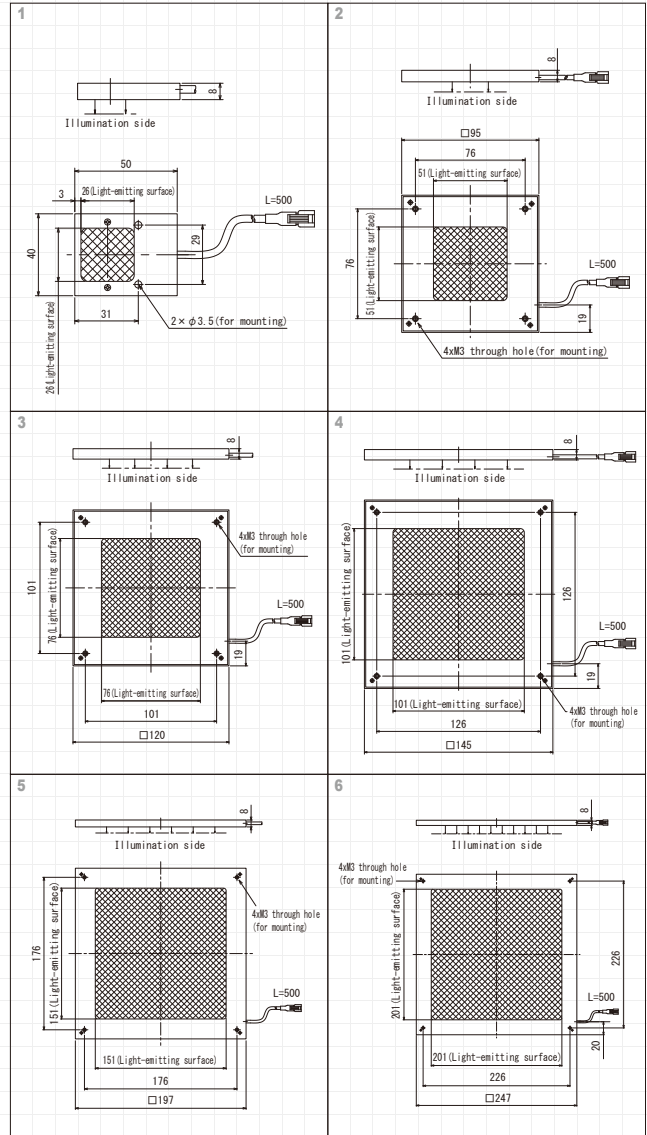

LIGHTING STRUCTURE

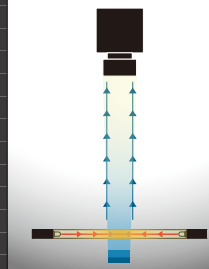

Effect Reduces irregular surfaces and reflection for flat, clear images.

