

Dome Light

Square Flat-surface Light


IPQC series

Indirect light with high luminance and uniform oblique light



DC 24V Specifications

Power LEDs

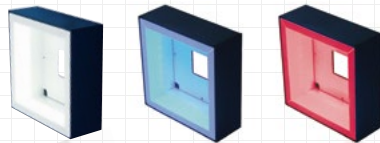


Model	Light Color	Power Consumption (W)	Input Voltage	SAG (*)	Power Supply	Drawing	
IPQC-22□	R	2.1	DC12V	FF	ILP-30M2 (P.69) IDGB series (P.67) other, overdrive power supply etc.	1	
	W	2.1					
	B	2.1					
IPQC-35□	R	4.2				FF	2
	B	4.7					
	W	4.7					
IPQC-51□	R	6.5		FF		3	
	W	6.8					
IPQC-78□	R	11.5		FF		4	
	W	12.5					
IPQC-99□	R	16.5		FA		5	
	W	19					
IPQC-123□	R	21	FF	6			
	B	18					
	W	24					
	B	22.5	D&E9				


□ represents light color (R=Red, W=White, B=Blue)

*Input voltage is DC 12V, but DC 24V models are also available.

*The SAG value indicates the maximum voltage setting for SAG power supplies. For details, see page 75.

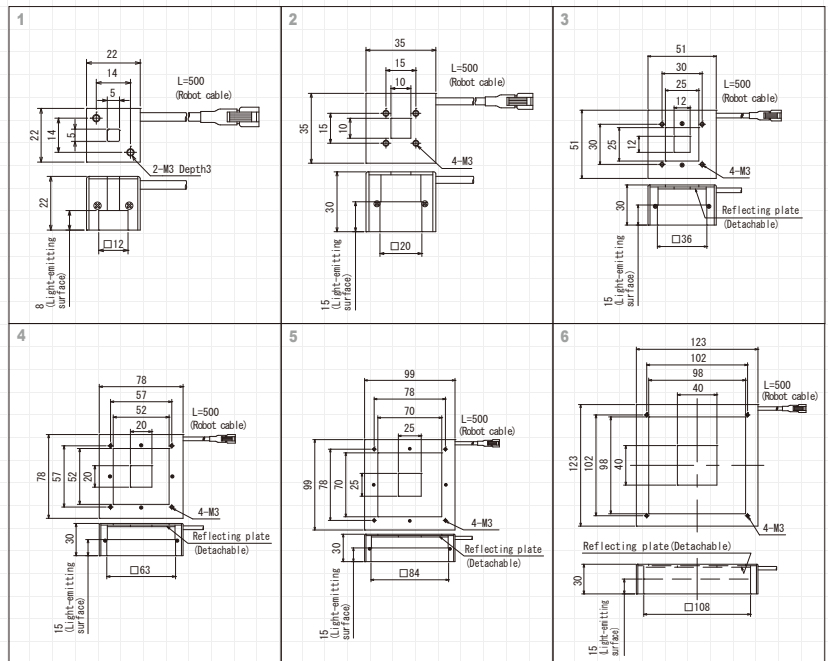


Shadowless lighting from the dome lighting

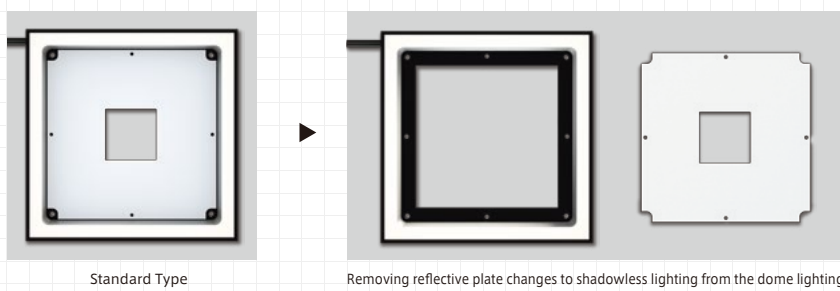


Brightness Comparison With Previous Models (Reference Values)


White lighting (WD=10mm)



Blue lighting (WD=10mm)



Red lighting (WD=10mm)



Effect → An image without surface reflection can be obtained by illuminating the subject with uniform oblique light.

