

## MV-CB060-10UM/UC-S

6 MP 1/1.8" CMOS USB3.0 Board Level Camera

### Introduction

MV-CB060-10UM/UC-S camera adopts Sony IMX178 sensor to provide high-quality image. It adopts M12-mount and is small in size, which can meet different spatial requirements.



**GEN*i*CAM**

**USB<sup>TM</sup>**  
VISION

### Key Feature

- Single board design for flexible installation
- Supports auto and manual adjustment for gain, exposure control, white balance, LUT, Gamma correction, etc
- Adopts image interpolation algorithm for color camera to have better color correction
- Power supply and data transmission via USB3.0 interface
- Compatible with USB3 Vision Protocol, GenICam standard, and the third-party software based on these protocol and standard


### Available Model

- Mono camera: MV-CB060-10UM-S
- Color camera: MV-CB060-10UC-S


### Applicable Industry

Electronic semiconductor, factory automation, logistics, liquor and beverage, medicine packing, etc.

### Sensor Quantum Efficiency


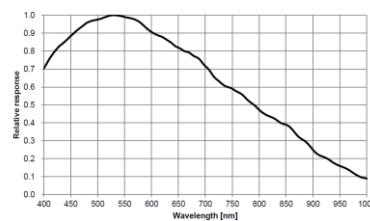


MV-CB060-10UM-S

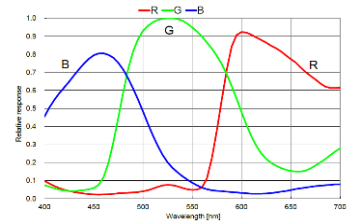

MV-CB060-10UC-S

### Dimension

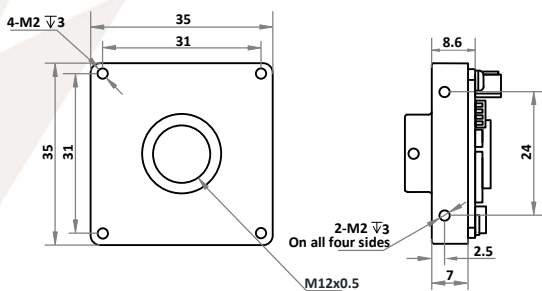

Unit: mm



## Specification

Model	MV-CB060-10UM-S	MV-CB060-10UC-S
<b>Camera</b>		
Sensor type	CMOS, rolling shutter	
Sensor model	Sony IMX178	
Pixel size	2.4 μm × 2.4 μm	
Sensor size	1/1.8"	
Resolution	3072 × 2048	
Frame rate	17 fps	29 fps
Dynamic range	71.3 dB	
SNR	41.3 dB	
Gain	0 dB to 20 dB	
Exposure time	27 μs to 2.5 s	24 μs to 2.5 s
Shutter mode	Supports Off/ Once/ Continuous exposure mode	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10p/12/12p	Mono8/10/12, Bayer RG 8/10/10p/12/12p YUV422Packed, YUV422_YUYV_Packed, RGB8
Acquisition mode	Continuous mode and SingleFrame mode	
Binning	Supports 2 × 2	
Decimation	Not support	
Reverse image	Supports horizontal reverse image output	
<b>Electrical features</b>		
Data interface	USB3.0	
Digital I/O	Bi-directional non-isolated I/O x 2 (Line 1, Line 2)	
Power supply	USB3.0 power supply	
Power consumption	< 1.5 W@5 VDC	
<b>Structure</b>		
Lens mount	M12-Mount	
Dimension	35 mm × 35 mm × 8.6 mm (1.4" × 1.4" × 0.3")	
Weight	Approx. 30 g (0.07 lb.)	
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)	
Humidity	20% to 80% RH, without condensation	
<b>General</b>		
Client software	MVS or third-party software meeting with USB3 Vision Protocol	
Operating system	32/64-bit Windows XP/7/10, 32/64-bit Linux	
Compatibility	USB3 Vision, GenICam	
Certification	CE, FCC, RoHS, KC	



<p><b>Germany, Austria, Switzerland</b>                  Sedeco Imaging GmbH                  Unterer Dammweg 12                  76149 Karlsruhe                  Germany                  T. +49 721 5604 7980                  info@sedeco-imaging.com</p>	<p><b>BeNeLux</b>                  Sedeco Imaging B.V.                  Trasmolenlaan 12                  3447 GZ Woerden                  the Netherlands                  T. +31 348 749110                  info@sedeco-imaging.nl</p>
---	---

[www.sedeco-imaging.com](http://www.sedeco-imaging.com)