

MV-CA003-50GM/GC
0.3MP, 1/3" CCD, GigE Camera



The Hikvision MV-CA003-50GM/GC 0.3 MP 1/3" CCD GigE Camera is a high quality device that can be used in a variety of applications, including electronic semiconductor fabrication, factory automation, quality inspection.


Key Features

- Gigabit Ethernet interface providing 1Gbps bandwidth; Transmitting distance can be 100m without relaying.
- 128MB on-board buffer, for image burst transmitting and retransmitting.
- Support auto exposure control, LUT and Gamma correction.
- Cameras can be synchronized with hard trigger and soft trigger.
- Different exposure modes can be used to capture image.
- Embed special color interpolation algorithm which reproduces color performance better and supports auto white balance function.
- Compliant with GigE Vision V1.2, can be supported by third party software.


Application Scenarios

- Electronic semiconductor
- Factory automation
- Quality Inspection

Spectral Response

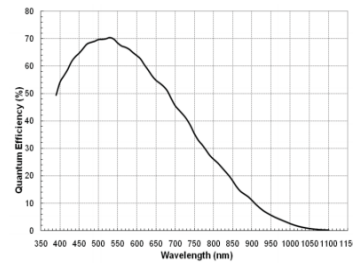

MV-CA003-50GM Quantum Efficiency



MV-CA003-50GC Quantum Efficiency

Order Models


- Mono: MV-CA003-50GM
- Color: MV-CA003-50GC



Specifications

Model	MV-CA003-50GM	MV-CA003-50GC
Parameters	0.3MP, 1/3" CCD, GigE Camera	
Camera		
Sensor	RJ33	
Pixel Size	7.4μm×7.4μm	
Sensor Size	1/3"	
Resolution	640×480	
Frame Rate	200fps	
Dynamic Range	>52dB	
SNR	>37dB	
Gain Range	0-20dB	
Exposure Time	20μs-1sec	
Shutter Mode	Global Shutter. Auto-Exposure, Manual Exposure, One-key Exposure	
Data Interface	Gigabit Ethernet	
General Purpose I/O	Opto-isolated input x1, Opto-isolated output x1, Bi-directional non-isolated I/O x1	
Image Buffer	128MB	
Data Format	Mono 8/10/10p/12/12p	Mono 8/10/12, RGB8, Bayer GB 8/10/10p/12/12p, YUV 422 Packed, YUV422_YUYV_Packed
General		
Power	Approx. 3.6W@12VDC, Voltage 5~15VDC, PoE supported	
Temperature	Working Temperature 0~50°C, Storage Temperature -30~70°C	
Humidity	20%-80% RH without condensation	
Dimension	29mm×29mm×42mm	
Weight	Approx. 68g	
Lens Interface	C-Mount	
Software	MVS or Third-Party Software supporting GigE Vision Protocol	
Operating System	Windows XP/7/10 32/64bits	
Compliance	GigE Vision	
Certification	CE, FCC, RoHS	

Dimensions

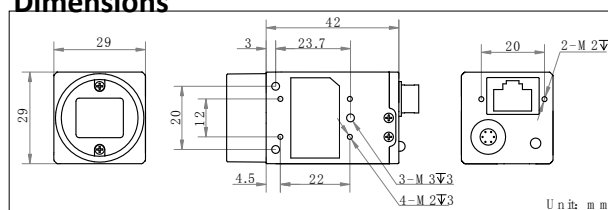

Recommended Accessories

- **Power:** 12VDC @1A power adapter
- **NIC:** Intel Pro1000 and above version recommended
- **Network Cable:** CAT5e or CAT6 network cable recommended



Germany, Austria, Switzerland

Sedeco Imaging GmbH
 Unterer Dammweg 12
 76149 Karlsruhe
 Germany
 T. +49 721 5604 7980
 info@sedeco-imaging.com

BeNeLux

Sedeco Imaging B.V.
 Trasmolenlaan 12
 3447 GZ Woerden
 the Netherlands
 T. +31 348 749110
 info@sedeco-imaging.nl

www.sedeco-imaging.com