

## MV-CA016-10GM/GC

1.6 MP 1/2.9" CMOS GigE Area Scan Camera

### Introduction

MV-CA016-10GM/GC camera adopts Sony IMX 273 sensor and provides high quality image. The GigE interface provides high-speed and real-time transmission of uncompressed data with the maximum frame rate reaching 78.2 fps at full resolution.




**GIGEVISION GENiCAM**


### Key Feature

- Adopts GigE interface and max. transmission distance of 100 meters without relay
- Supports auto and manual adjustment for gain, exposure control, white balance, LUT, Gamma correction, and etc.
- Supports hardware trigger, software trigger, and etc.
- Up to 128 MB local memory for burst transmission and retransmission
- Compatible with GigE Vision 2.0 Protocol, GeniCam standard, and the third-party software based on these protocol and standard

### Sensor Quantum Efficiency

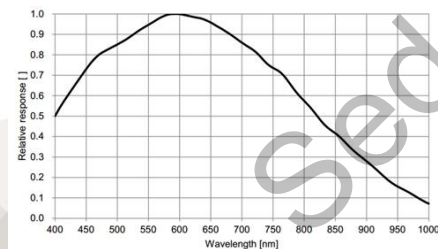

MV-CA016-10GM

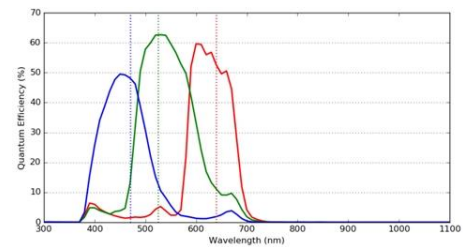

MV-CA016-10GC


### Applicable Industry

Electronic semiconductor, factory automation, quality inspection and etc.

### Available Model

- Mono Camera: MV-CA016-10GM
- Color Camera: MV-CA016-10GC

### Dimension

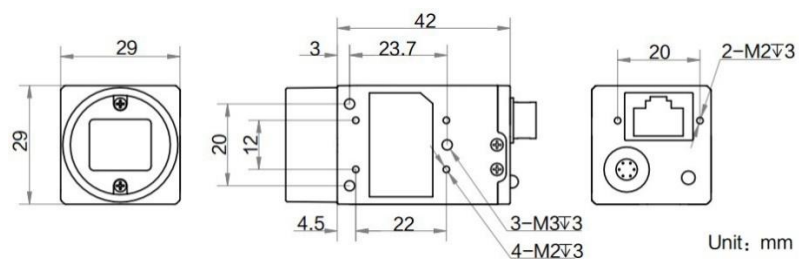

## Specification

Model	MV-CA016-10GM	MV-CA016-10GC
Parameters	1.6 MP 1/2.9" CMOS GigE Area Scan Camera	
<b>Camera</b>		
Sensor type	CMOS, global shutter	
Sensor model	Sony IMX273	
Pixel size	3.45 $\mu\text{m}$ $\times$ 3.45 $\mu\text{m}$	
Sensor size	1/2.9"	
Resolution	1440 $\times$ 1080	
Frame rate	Mono8 78.2 fps	Bayer8 78.2 fps
Dynamic range	71.4 dB	
SNR	41 dB	
Gain	0 dB to 20 dB	
Exposure time	1 $\mu\text{s}$ to 10 s	
Shutter mode	Off/ Once /Continuous exposure mode	
Pixel format	Mono 8/10/10p/12/12p	Mono8/10/12, Bayer RG 8/10/10p/12/12p YUV 422 Packed, YUV422_YUYV_Packed, RGB8
Acquisition mode	Continuous mode, single frame mode	
Binning	Supports 1 $\times$ 1, 2 $\times$ 2	
Decimation	Supports 1 $\times$ 1, 2 $\times$ 2	
Reverse image	Supports horizontal and vertical reverse image output	
Image buffer	128 MB	
<b>Electrical features</b>		
Data interface	Gigabit Ethernet (1000 Mbit/s), Fast Ethernet (100 Mbit/s)	
Digital I/O	6-pin Hirose connector provides power supply and I/O, including opto-isolated input x 1, opto-isolated output x 1, and bi-directional non-isolated I/O x 1	
Power supply	9 VDC to 26 VDC, supports PoE power supply	
Power consumption	3 W@12 VDC	
<b>Structure</b>		
Lens mount	C-Mount	
Dimension	29 mm $\times$ 29 mm $\times$ 42 mm (1.1" $\times$ 1.1" $\times$ 1.7")	
Weight	Approx. 68 g (0.15 lb)	
Ingress protection	IP 30 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$ ) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$ )	
Humidity	20% to 80% RH, without condensation	
<b>General</b>		
Client software	MVS or third-party software meeting with GigE Vision Protocol	
Operating system	Windows XP/7/10 32/64bits, Linux 32/64bits or MacOS 64bits	
Compatibility	GigE Vision V2.0, GenICam	
Certification	CE, FCC, RoHS	



Germany, Austria, Switzerland  
 Sedeco Imaging GmbH  
 Unterer Dammweg 12  
 76149 Karlsruhe  
 Germany  
 T. +49 721 5604 7980  
 info@sedeco-imaging.com

BeNeLux  
 Sedeco Imaging B.V.  
 Trasmolenlaan 12  
 3447 GZ Woerden  
 the Netherlands  
 T. +31 348 749110  
 info@sedeco-imaging.nl

[www.sedeco-imaging.com](http://www.sedeco-imaging.com)