

MV-CL021-40GM

2048P Line Scan CMOS GigE Camera

GEN*i*CAM

GIG*E*
VISION



Introduction

MV-CL021-40GM camera supports line trigger mode, frame trigger mode, line + frame trigger mode, etc. It uses GigE interface to transmit non-compressed images in real time with max. line rate reaching 51 kHz.

Key Feature

- Adopts GigE interface and max. transmission distance of 100 meters without relay
- 128 MB on-board buffer, for image burst transmitting and retransmitting
- Supports auto exposure control, LUT, Gamma correction, etc.
- Compatible with GigE Vision Protocol V2.0, GenICam Standard, and third-party software based on these protocol and standard


Available Model

Mono Camera: MV-CL021-40GM


Applicable Industry

Printing, texture, railway, logistics, metallurgy, food, pharmaceuticals, material sorting, etc.

Sensor Quantum Efficiency

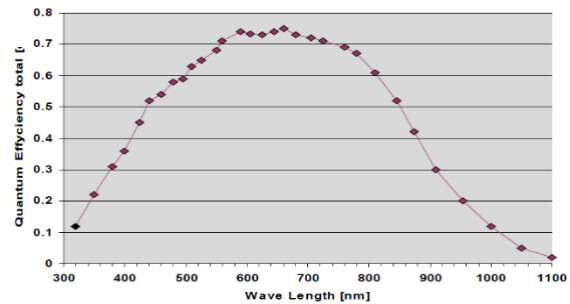

Dimension

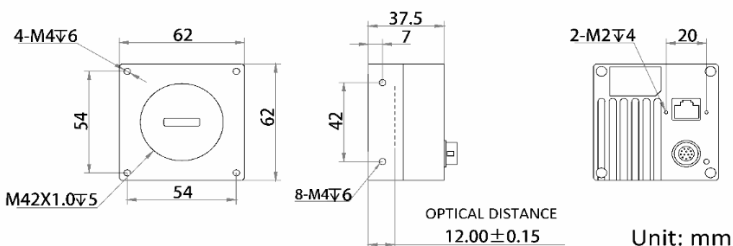

Specification

Model	MV-CL021-40GM
Camera	
Sensor type	CMOS
Pixel size	7 μm x 7 μm
Resolution	2048 x 1
Max. line rate	51 kHz@2048 x 1
Pixel format	Mono 8/10/10p/12/12p
Dynamic range	60 dB
SNR	40 dB
Gain	0 dB to 12 dB
Exposure time	2 μs to 10 ms
Shutter mode	Off/Once/Continuous exposure mode, supports fixed exposure time
Mono/color	Mono
Reverse image	Supports horizontal reverse image output
Binning	Support 1/2/3/4
External trigger mode	Line trigger, frame trigger, line + frame trigger
Synchronization	External trigger, internal trigger
Image buffer	128 MB
Electrical features	
Data interface	Gigabit Ethernet
Digital I/O	12-pin Hirose connector provides power supply and I/O, including differential input × 2 (Line 0, Line 3), differential output × 2 (Line 1, Line 4), and bi-directional non-isolated I/O × 1 (Line 2)
Power supply	5 VDC to 15 VDC, supports PoE power supply
Power consumption	< 4 W @12 VDC
Structure	
Lens mount	M42 × 1.0, back focal distance 12 mm, F mount or C mount lens supported with lens adapter
Dimension	62 mm × 62 mm × 37.5 mm (2.4" × 2.4" × 1.5")
Weight	Approx. 170 g (0.4 lb.)
Ingress protection	IP40 (under proper lens installation and wiring)
Temperature	Working temperature: 0°C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)
Humidity	20% to 80% RH, without condensation
General	
Client software	MVS or third-party software meeting with GigE Vision Protocol
Operating system	32/64-bit Windows XP/7/10 and 32/64-bit Linux
Compatibility	GigE Vision, GenICam
Certification	CE, FCC, RoHS

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

SEDECO
IMAGING

Germany, Austria, Switzerland
Sedeco Imaging GmbH
Unterer Dammweg 12
76149 Karlsruhe
Germany
T. +49 721 5604 7980
info@sedeco-imaging.com

BeNeLux
Sedeco Imaging B.V.
Trasmolenlaan 12
3447 GZ Woerden
the Netherlands
T. +31 348 749110
info@sedeco-imaging.nl

www.sedeco-imaging.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.